


# **VarioFil<sup>®</sup> S-HT**

## Technical data

# Dimensions

Very flexible compact spinning line for the production of partially oriented (POY) or fully drawn (FDY) as well as high tenacity yarn (HTY)

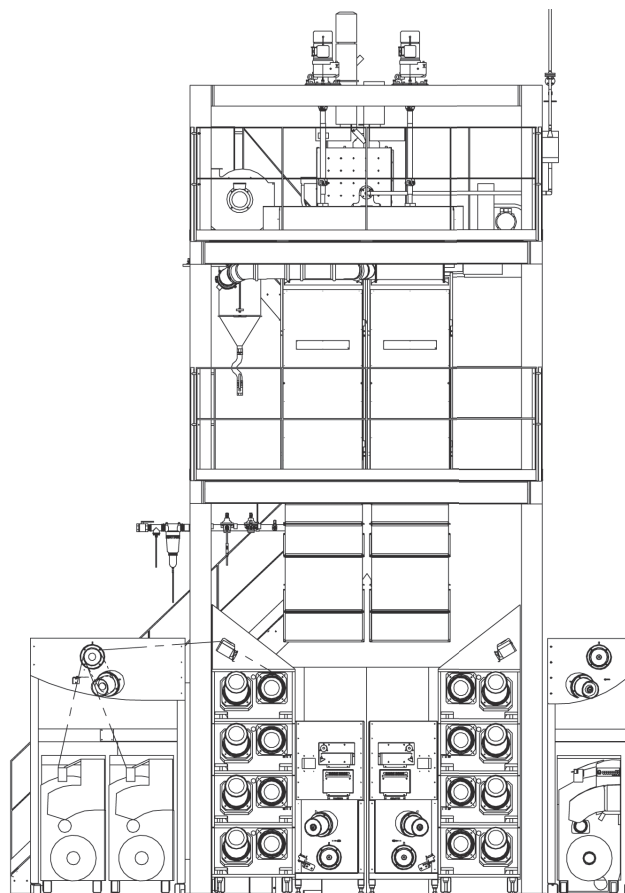

polymer*	Polypropylen (PP)
capacity PP	up to 170 kg/h
no. of extruders	1
no. of yarn ends	1 x 4 or 2 x 4 or 4 x 4 or 2 x 6 or 1 x 8 or 2 x 8 or 2 x 12
no. of yarn ends on the winder	3, 4, 6 or 8
available stroke	250 mm or 170 mm or 120 mm
titer range (final) PP	100–1500 den
spin pack size	suitable for a 170 mm spinneret
dimensions (W x D x H)**	6,5 m x 7 m x 9 m**
winder	ACW 4IY
godets	HF 220/400, e-save labelled

\* other resins on request

\*\* approximately depending on material dosing system

## Oerlikon Barmag

Zweigniederlassung der  
Oerlikon Textile GmbH & Co. KG  
Leverkuser Straße 65  
P.O. Box 11 02 40  
42862 Remscheid  
GERMANY  
Phone +49 21 91 67-0  
Fax +49 21 91 67-12 04  
info.barmag@oerlikon.com

The information supplied in this brochure is for guidance only.  
We reserve the right to modify it at any time.

Reprint only with expressed permission of Oerlikon Barmag

OBA 222 d / 09/2016  
Studio 45  
Subject to changes