

Material Product Data Sheet

Iron-Based Specialty Thermal Spray Powders

Thermal Spray Powder Products:
Diamalloy 1008, Diamalloy 1010, Metco 1020B,
Metco 1040B

1 Introduction

Diamalloy™ 1008 is a patented material developed for corrosive wear applications below 650 °C (1200 °F) applied using the DiamondJet™ HVOF spray process. This multi-component powder produces cost-effective coatings with optimum hardness, adhesive and abrasive wear resistance and toughness. Corrosive wear resistance is superior to coatings of ferritic and martensitic stainless steels. This material may be used as an economical, thermal sprayed alternative to chromium plating with similar performance to extend component life, comparable finishes after grinding, and added advantages such as faster material buildup rates.

Diamalloy 1010 is an iron-chromium alloy with significant nickel content and molybdenum added for improved oxidation and corrosion resistance. It can be used in high temperature applications, especially those involving sliding and abrasion wear such as exhaust valves on internal combustion engines.



Metco™ 1040B has been developed using the Scoperta™ Computational Design Process as a manganese steel compatible hardfacing overlay with a high carbide fraction for wear resistance. In many mining processes where manganese steel is used, the steel is gouged or wears away before it has a chance to work harden.

1.1 Typical Uses and Applications

- Hard bearing surfaces: bearing journals, fuel pump rotors, sleeves
- Resist abrasive grains: cylinder liners, pistons, pump plungers, hydraulic rams, crankshaft bearings
- Resist fretting (intended or non-intended motion): machine bedways, wear rings, press fits, bearing seats
- Resist particle erosion (low temperature): exhaust fans, hydroelectric valves
- Salvage and buildup on grindable steel: mis-machined parts, worn parts
- High temperature environments to resist oxidation
- Applications where sliding and abrasive wear resistance is required

Quick Facts

Classification	Iron-based
Chemistry	FeCrNiMoC
Manufacture	Atomized
Morphology	Spheroidal / irregular or spheroidal
Purpose	Hardface corrosive wear resistance
Service Temperature	≤ 650 °C (1200 °F)
Process	HVOF

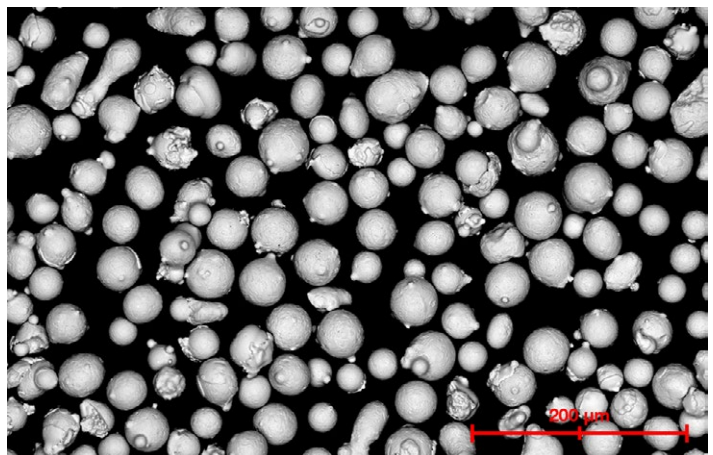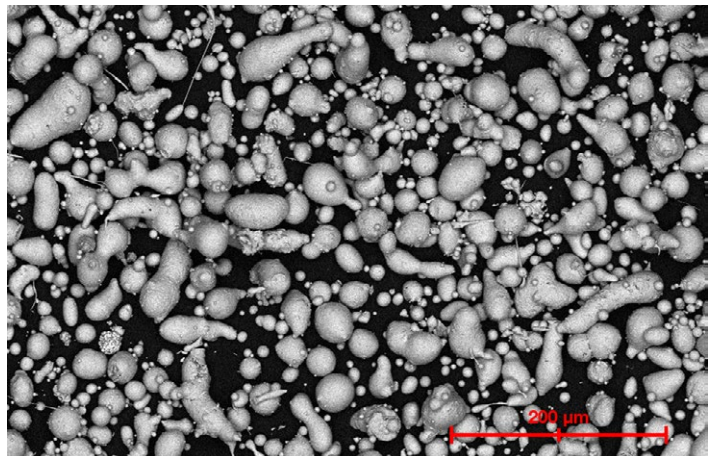

SEM photomicrograph morphology of Diamalloy 1008 (top) and Diamalloy 1010 (bottom)

2 Material Information

2.1 Chemical Composition (nominal wt. %)

Product	Fe	Cr	Mo	Ni	Si	B	Cu	C	Nb	Ti	Mn	V
Diamalloy 1008	Balance	18	12	4	3.5	3	2.5	0.6	---	---	---	---
Diamalloy 1010	Balance	28	4.5	16	1.5	---	---	1.75	---	---	---	---
Metco 1020B	Balance	NR	NR	--	--	--	--	--	NR	NR	---	---
Metco 1040B	Balance	NR	--	--	--	--	--	NR	---	---	NR	NR

NR = Not Reported

2.2 Particle Size Distribution and Other Characteristics

Product	Nominal Particle Size Distribution (µm)	Morphology	Manufacturing Method
Diamalloy 1008	-45 +5.5	Spheroidal / Irregular	Atomized Blend
Diamalloy 1010	-45 +16	Spheroidal	Gas Atomized
Metco 1020B	-53 +20	Spheroidal	Gas Atomized
Metco 1040B	-53 +20	Spheroidal	Gas Atomized

Upper particle size determined by sieve analysis, lower particle size analysis by laser diffraction (Microtrac).

2.3 Key Selection Criteria

- These products are designed for application using the HVOF spray process.
- Diamalloy 1008, Metco 1020B and Metco 1040B can be used as an effective and economical alternatives to hard chromium plating, as well as thermal sprayed Cr₃C₂-NiCr coatings and tool steel-based coatings. These two materials are also superior to NiCrFeSiBC-type coating in terms of economics, but also exhibit excellent wear resistance.
- Diamalloy 1008 and Diamalloy 1010 are recommended for those applications where high temperature oxidation plays a critical role; however, Diamalloy 1010 offers superior oxidation and corrosion resistance compared to Diamalloy 1008.
- Diamalloy 1010 and Metco 1020B offers a more favorable combination of wear and corrosion resistance compared to Diamalloy 1008.
- Diamalloy 1010 and Metco 1040B can be used in applications where sliding wear, abrasion resistance and higher hardness is desired.
- The high chromium content combined with the nickel content of Diamalloy 1010 contribute to the excellent corrosion resistance of these two alloys.

2.4 Related Products

- To maximize the corrosion resistance of Diamalloy 1008 coatings, use a sealer such as Metcoseal™ AP or other appropriate sealer product.
- If greater coating thickness is required, the use of a bond coat such as Diamalloy 4008NS is strongly recommended.
- Better wear resistance and acceptable corrosion resistance can be achieved with atmospheric plasma sprayed self-flux-

ing alloys such as Metco 12C, Metco 14E, Metco 15E, Metco 15F or Metco 16C-NS. For HVOF spray, Diamalloy 2001 can be used. When fused, coatings are fully dense, virtually free of porosity and metallurgically bonded to the substrate. However, these materials can also be used in the as-sprayed condition provided that coating wear properties and bond strength are sufficient for the application.

- If significantly higher wear resistance is required for applications below 500 °C (930 °F), tungsten carbide cobalt powders such as WOKA 31XX and WOKA 32XX series products should be chosen.
- Choose Metco 5803 [WC 12Co 25Ni-based superalloy] to produce coatings that have an excellent combination of wear and corrosion resistance. Coatings of these materials applied using the HVOF process have corrosion resistance and fatigue properties comparable to hard chromium plating. The coatings are resistant to wear by abrasion, contact with hard surfaces, particle erosion and fretting at temperatures up to 500 °C (930 °F).
- If high temperature wear and oxidation resistance is required at temperatures up to 800 °C (1470 °F), Cr₃C₂-NiCr products such as WOKA 71XX, WOKA 72XX or WOKA 73XX series can be used. These coatings are excellent hard chromium alternatives with especially good corrosion resistance in chloride, acidic and alkaline environments.
- Metco 1020A and Metco 1040A are chemically equivalent to Metco 1020B and Metco 1040B, respectively; but designed for application via cladding processes.

3 Coating Information

3.1 Key Thermal Spray Coating Information

Please contact your Oerlikon Metco Account Representative for parameter availability. For specific coating application requirements, the services of Oerlikon Metco's Coating Solution Centers are available.

3.2 Spray Guns

Recommended HVOF Spray Guns

DiamondJet (water-cooled)

4 Commercial Information

4.1 Ordering Information and Availability

Product	Order No.	Package Size	Availability	Distribution
Diamalloy 1008	1000802	5 lb (approx. 2.25 kg)	Special Order	Global
Diamalloy 1010	1078424	5 kg (approx. 11 lb)	Special Order	Global
Metco 1020B	1533807	5 kg (approx. 11 lb)	Stock	Global
Metco 1040B	1300144	10 lb (4.5 kg)	Stock	Global

4.2 Handling Recommendations

- Store in the original container in a dry location.
- Tumble contents gently prior to use to prevent segregation.
- Open containers should be stored in a drying oven to prevent moisture pickup.

4.3 Safety Recommendations

See the SDS (Safety Data Sheet) in the localized version applicable to the country where the material will be used. SDS are available from the Oerlikon web site at www.oerlikon.com/metco (Resources – Safety Data Sheets).

Product	SDS No.
Diamalloy 1008	50-328
Diamalloy 1010	50-1539
Metco 1020B	50-2670
Metco 1040B	50-2211