

Press Release

Oerlikon Barmag pumps at the Bondexpo 2017

Highest precision for high-viscosity media

Remscheid, August 16, 2017– whether for bonding, for casting or for insulating, for sealing or for foaming – at this year’s Bondexpo, the international trade fair for bonding technology, Oerlikon Barmag will be showcasing its gear metering pump program specifically designed for the joining/binding work steps. Between October 09 and 12, the company will be presenting in hall 6 – among other things – components for silicone processing and hot-melt adhesive applications, but also for processing resins and polyurethanes and other higher-viscosity liquids (booth 6422).

Efficiency in mastering viscous media – the GA series

When applying hot-melt adhesives, the focus lies above all on the evenness of the application. However, precise metering not only presupposes the fast and reproducible setting of an operating point, but also low-pulsation feeding of the conveying medium. Supplementing the proven GM series, Oerlikon Barmag has now developed the GA range for conveying higher-viscosity media. The GA series is available for conveying volumes of between 1.25 and 30 cm³/rev (0.6-144 l/h). It has been designed for pressures of up to 200 bar, for viscosities of up to 1,500 Pas as well as for temperatures of up to a maximum of 225 °C. With this new program of pumps, Oerlikon Barmag offers tailor-made solutions for all applications for which precisely-defined, even metering is absolutely essential.

Conveying and metering using a single unit – the drum pump

The drum pump is designed especially for conveying and metering high-viscosity materials such as adhesives, silicones, etc., from drums and other large containers and for pressures of up to 250 bar. Thorsten Wagener, the sales employee responsible for pumps used in industrial and chemical applications comments: “The drum pump not only conveys high-viscosity materials from the drum, it also meters the medium to the mixing head without any additional interim stops and with the customary volumetric efficiency.” In close agreement with the customer, the gear pump and drum follow-up plate are harmonized in such a way as to ensure that the plate can effortlessly reach the bottom of the container, hence guaranteeing a very small amount of residue totaling <1%. This has a positive impact on both the materials costs and the production process.

Working under high pressure


In high-pressure technology, conveying small volumes with low viscosities is a particular challenge. Specifically for this application, Oerlikon Barmag has expanded the GM series with round plate package to include an option for the pressure build-up capacity. This multi-stage pump is available for conveying volumes of between 0.05 and 20 cm³/rev and guarantees the generation of operating pressures even at low viscosities (for example, 250 bar, 100 mPas). To this end, higher volumetric efficiencies or a larger useable speed range can be achieved. The robust gear metering pump ensures continual low-pulsation operation. Hence, high-pressure applications conveying minimum flow-through rates (for example, 0.5g – 1.5g/sec.) can also be covered for the very first time. For the manufacturers of PUR

molded parts, block foams, refrigeration unit insulation and sandwich panels, this means consistent process stability and low investment costs.

One for all – high-speed metering made easy

The new high-speed metering pumps have been developed especially for lightly-lubricating and abrasive media. With their enlarged speed range (30 - 500 rpm), they cover a large application area for which several pumps of varying sizes have had to be used to date. For the manufacturer, this means less work when switching production and smaller spare parts inventories. The compact construction of the pump (ø65 mm) reduces the space required in the machine and the low weight (1.4 kg) keeps the load as low as possible, which in turn has a positive impact on the construction of the machine. The external lifetime-lubricated ball-bearings ensure that the pump is not only very durable, they also do not come into contact with the respective product.

640 words

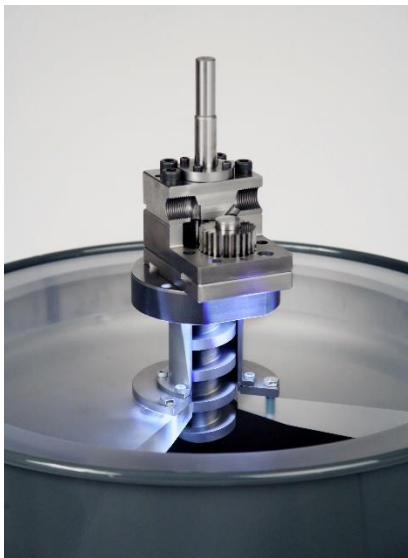

Specialist for conveying and metering high-viscosity materials: the drum pump with conveying screw on drum follow-up plate

For further information:

Ute Watermann
Marketing, Corporate Communications
& Public Affairs
Tel. +49 2191 67-1634
Fax +49 2191 67-70 1634
ute.watermann@oerlikon.com

André Wissenberg
Marketing, Corporate Communications
& Public Affairs
Tel. +49 2191 67-2331
Fax +49 2191 67-70 2331
andre.wissenberg@oerlikon.com

About Oerlikon

Oerlikon (SIX: OERL) is a leading global technology Group, with a clear strategy to become a global powerhouse in surface solutions, advanced materials and materials processing. Backed by the key ability to intelligently engineer and process surface solutions and advanced materials, the Group is committed to invest in value-bringing technologies that provide customers with lighter, more durable, more efficient and environmentally sustainable products. A Swiss company with over 100 years of tradition, Oerlikon has a global footprint of over 13 500 employees at more than 180 locations in 37 countries and sales of CHF 2.3 billion in 2016. The company invested CHF 94 million in R&D in 2016 and has over 1 000 specialists developing innovative and customer-oriented products and services.

For further information: www.oerlikon.com

About the Oerlikon Manmade Fibers segment

With its Oerlikon Barmag and Oerlikon Neumag brands, Oerlikon Manmade Fibers segment is the world market leader for manmade fiber filament spinning systems, texturing machines, BCF systems, staple fiber systems, nonwovens and artificial turf systems and – as a service provider – offers engineering solutions for the entire textile value added chain. As a future oriented company, the research and development at this division of the Oerlikon Group is driven by energy-efficiency and sustainable technologies. With the expansion of the product range to include polycondensation systems and their key components, the company now caters to the entire process – from the monomer all the way through to the textured yarn. The primary Oerlikon Barmag markets are in Asia, and – for Oerlikon Neumag – in the USA, Turkey and China. Correspondingly, Oerlikon Barmag and Oerlikon Neumag – with just under 2,500 employees – has a worldwide presence in 120 countries as part of the Oerlikon Manmade Fibers network of production, sales and distribution and service organizations. At the R&D centers in Remscheid, Neumünster and Chemnitz, highly-qualified engineers and technicians develop innovative and technologically-leading products for tomorrow's world.

For further information: www.oerlikon.com/manmade-fibers